

PRN.G



ATEX




ZONE 1-2 / 21-22

IP 66

-30 °C < T

a < +80 °C



Product

PRN.G Series Brass Plug

Certification

SCA23ATEX195X

Marking

II 2G Ex db IIC Gb

II 2D Ex tb IIIC Db

IP

IP 66

Ambiant Temp.

-30 °C < Ta < +80 °C

Standar ts

EN60079-0: 2018; EN60079-1: 2014; EN60079-31: 2014

Threads

NPT - Metric - Gass Thread

Body

Brass Nickel Plated

Gaskets


NBR o-ring on Body

Color


Nickel or Chrome Plated

Application

Oil refineries, Chemical and petrochemical plants, Boiler rooms etc.

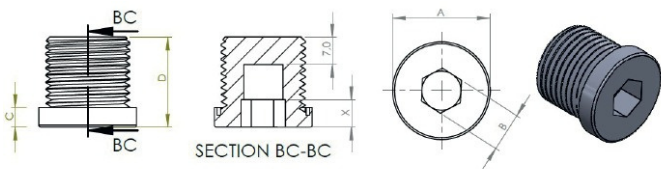

	A	B	C	D	X
1/2" Gas	25	10	5	23	10
3/4" Gas	32	12	5	23	10
1" Gas	36	12	6	30	10
M20	25	10	5	23	10
M25	32	12	5	23	10
M32	36	12	6	30	10

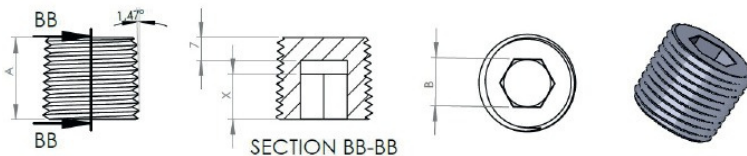

	A	B	X
1/2" NPT	19	10	8
3/4" NPT	19	12	8
1" NPT	24	12	10



ATEX Document Validation
T.C. Sanayi ve Teknoloji Bakanlığı

PRN.G

Thread Type

- PRNG.1G -(1/2" Gas)
- PRNG.2G -(3/4" Gas)
- PRNG.3G -(1" Gas)
- PRNG.1M -(Metric 20)
- PRNG.2M -(Metric 25)
- PRNG.3M -(Metric 32)
- PRNG.1N -(1/2" NPT)
- PRNG.2N -(3/4" NPT)
- PRNG.3N -(1" NPT)